







YCII-100S/D, YCII-150S/D, YCII-250S/D


■ Features

-  **80–300 tf**
-  **3/5-axis**
-  **Single support type**
-  **Reduced overall height type**
-  **On robot body**
-  **E-touch compact-YC**

All-Axis Servo Driven Take-Out Robot for Energy-Smart Manufacturers

Compared to older models, YC series robots benefit from much lighter components and structures by incorporating design optimization technology. This weight reduction results in significantly better energy efficiency and longevity. Design optimization also targeted factors like natural oscillation and damping characteristics to greatly reduce arm vibration. The YC II -100/150/250 is sized for 80-300 tf molding machines.

E-touch compact-YC^{PAT.}



- ECO Vacuum
- ECO Monitor
- Predictive Maintenance*

* Continuously monitors robot during operation and alerts operator with a message if potential trouble symptoms are detected. This function elevates maintenance from preventative to predictive.

Standard equipment

■ Standard Specifications

Power source	Driving method	Control method	Air pressure	Wrist flip angle
Single phase AC200V/220V (50/60Hz)	Digital servo motor 3/5-axis	Micro computer control	0.49MPa Maximum allowable air pressure (factory) 0.7MPa	90 deg.

Model	Power consumption	Traverse stroke (mm)	Kick stroke (mm)		Vertical stroke (mm)		Air consumption (NL/cycle)	Payload (kg)	Clamping force (tf)
			Main arm	Sub arm	Main arm	Sub arm			
YC II -100S	S type 1.9kVA	1100 [1500] [1700] [1900] [2200] [2500]	578	–	700	–	5.2 (ECO Vacuum OFF)	5	80 ~ 130
YC II -100D			518	518	<850>	700 <850>	1.7 (ECO Vacuum ON)		
YC II -150S	D type 2.5kVA	1500 [1700] [2200]	578	–	850	–	5.6 (ECO Vacuum OFF)	5	100 ~ 220
YC II -150D			518	518	<950>	850 <950>	1.7 (ECO Vacuum ON)		
YC II -250S	AC200V 12.3A	[1900] [2200] [2500]	728	–	950	–	5.9 (ECO Vacuum OFF)	5	180 ~ 300
YC II -250D			668	668	<1100>	950 <1100>	1.9 (ECO Vacuum ON)		

S type: Robot is equipped with product take-out arm only. D type: Robot is equipped with product take-out arm and runner take-out arm.

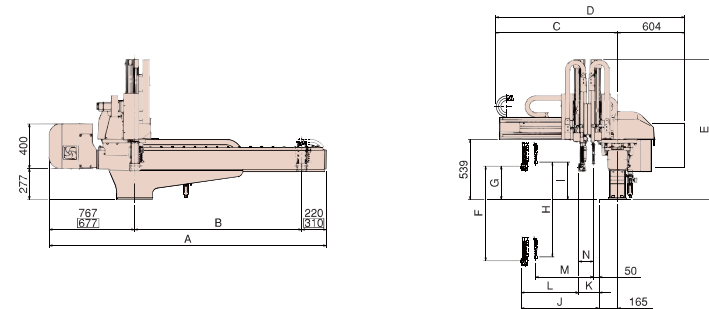
[]: Modified traverse stroke

Payload includes the end-of-arm tool.

Higher payloads possible, depending on take-out settings and speeds.



■ Dimensions (mm)



Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N
YC II -100S	2097 (2497)	1100 (1500)			1182 (1254)	700 (850)		700 (850)						
YC II -100D	2097 (2887)	1100 (1900)	1093	1696						700		518 [578]	518	
YC II -150S	2487 (2887)	1500 (1700)			1254 (1310)	850 (950)	300	850 (950)	335		182 [122]			
YC II -150D	2487 (2887)	1500 (1900)												
YC II -250S	3187 (3487)	2200 (2500)	1243	1846	1310 (1382)	950 (1100)		950 (1100)		850		668 [728]	668	
YC II -250D														

() : Modified traverse stroke

< > : Modified vertical stroke

[] : S-Type Dimensions

□ : For rear-side models